

Pass 3/4" Solids

Patented Lubrication
& Stall Free Air Motor

Patented Long Life
Diaphragm Design

Self-Cleaning Ball
Valve Enclosure

Yellow Series
General Purpose
Nylon Body



Red Series
FRASplas Body-
Fire Retardant
Antistatic
Construction -
Safe for Explosive
Environments
Atex
M1 Rating

Features / Benefits


- Patented long life diaphragm & self-cleaning valve
- Low air consumption
- True lube-free & stall-free air motor: less sensitive to abrasive particles in the air supply and no oil emissions in the exhaust air
- Low weight due to light weight plastic & aeronautical design approach. No need for metal pumps
- Anti-icing: not affected by moisture in air line
- Large solids handling (over 3/4" on 1" pump)
- High suction lift (rated to 20' dry and 27' wet)
- Longer lasting air motor due to unique design and modular components that eliminate the need to replace the entire motor when worn.
- Conductive plastic (FRASplas) pumps are safe for explosive environments. Rated and certified to ATEX M1
- Low noise level



Slurry Valve

"Pumps 2000" air operated dual diaphragm pumps were specifically designed for harsh mining duties and are guaranteed to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. Suitable for pumping applications in all industries.

Performance Curve

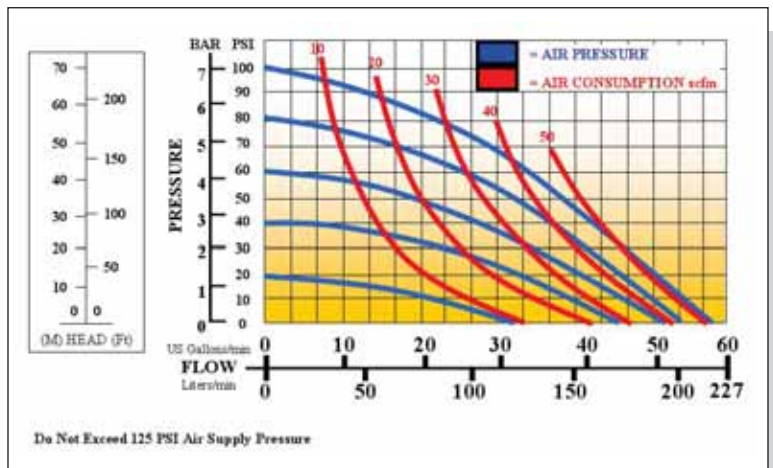

FLOW RATE:	0-58 gpm
AIR PRESSURE:	Up to 100 psi
FLUID CONNECTION:	1 inch (Internal Thread)
AIR INLET PORT:	1/2 inch (Internal Thread)
EXHAUST PORT:	3/4 inch (Internal Thread)
DELIVERY PRESSURE:	Tested to 87 psi
SUCTION PRESSURE:	Tested to 20 ft dry and 27 ft wet
PARTICLE SIZE:	Maximum 3/4 inch
PUMP WEIGHT:	16 pounds

Available from: _____

